



## Description

### JMT P-channel MOSFET

#### Features

- $V_{DS} = -30V$ ,  $I_D = -4.2A$
- $R_{DS(ON)} < 90\text{ m}\Omega$  @  $V_{GS} = -2.5V$   
 $R_{DS(ON)} < 75\text{ m}\Omega$  @  $V_{GS} = -4.5V$   
 $R_{DS(ON)} < 55\text{ m}\Omega$  @  $V_{GS} = -10V$
- High Power and Current Handling Capability
- Lead Free Product is Acquired
- Surface Mount Package


#### Application

- PWM Applications
- Load Switch
- Power Management

#### Package



SOT-23



### Absolute Maximum Ratings ( $T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Max.	Units
$V_{DSS}$	Drain-Source Voltage	-30	V
$V_{GSS}$	Gate-Source Voltage	$\pm 12$	V
$I_D$	Continuous Drain Current	$T_C = 25^\circ\text{C}$	-4.2
		$T_C = 100^\circ\text{C}$	-2.7
$I_{DM}$	Pulsed Drain Current <sup>note1</sup>	-17	A
$P_D$	Power Dissipation	$T_C = 25^\circ\text{C}$	1.2
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	104	$^\circ\text{C}/\text{W}$
$T_J, T_{STG}$	Operating and Storage Temperature Range	-55 to +150	$^\circ\text{C}$



## Electrical Characteristics (T<sub>C</sub>=25°C unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
<b>Off Characteristic</b>						
V <sub>(BR)DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> = -250μA	-30	-	-	V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = -24V, V <sub>GS</sub> = 0V,	-	-	-1	μA
I <sub>GSS</sub>	Gate to Body Leakage Current	V <sub>DS</sub> =0V, V <sub>GS</sub> = ±10V	-	-	±100	nA
<b>On Characteristics</b>						
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250μA	-0.7	-1	-1.3	V
R <sub>DS(on)</sub>	Static Drain-Source on-Resistance <small>note2</small>	V <sub>GS</sub> = -10V, I <sub>D</sub> = -4.2A	-	48	55	mΩ
		V <sub>GS</sub> = -4.5V, I <sub>D</sub> = -4A	-	56	75	
		V <sub>GS</sub> = -2.5V, I <sub>D</sub> = -1A	-	72	90	
g <sub>FS</sub>	Forward Transconductance	V <sub>DS</sub> = -5V, I <sub>D</sub> = -4.2A	-	10	-	S
<b>Dynamic Characteristics</b>						
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = -15V, V <sub>GS</sub> = 0V, f = 1.0MHz	-	880	-	pF
C <sub>oss</sub>	Output Capacitance		-	105	-	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		-	65	-	pF
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> = -15V, I <sub>D</sub> = -4.2A, V <sub>GS</sub> = -4.5V	-	8.5	-	nC
Q <sub>gs</sub>	Gate-Source Charge		-	1.8	-	nC
Q <sub>gd</sub>	Gate-Drain("Miller") Charge		-	2.7	-	nC
<b>Switching Characteristics</b>						
t <sub>d(on)</sub>	Turn-on Delay Time	V <sub>DD</sub> = -15V, I <sub>D</sub> = -4.2A, V <sub>GS</sub> = -10V, R <sub>GEN</sub> =6Ω	-	7	-	ns
t <sub>r</sub>	Turn-on Rise Time		-	3	-	ns
t <sub>d(off)</sub>	Turn-off Delay Time		-	30	-	ns
t <sub>f</sub>	Turn-off Fall Time		-	12	-	ns
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
I <sub>S</sub>	Maximum Continuous Drain to Source Diode Forward Current		-	-	-4.2	A
I <sub>SM</sub>	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-17	A
V <sub>SD</sub>	Drain to Source Diode Forward Voltage	V <sub>GS</sub> = 0V, I <sub>S</sub> = -4.2A	-	-	-1.2	V
t <sub>rr</sub>	Reverse Recovery Time	V <sub>GS</sub> =0V, I <sub>S</sub> =-4.2A, di/dt=100A/μs	-	11	-	ns
Q <sub>rr</sub>	Reverse Recovery Charge		-	3.5	-	nC

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. Pulse Test: Pulse Width≤300μs, Duty Cycle≤2%

## Typical Performance Characteristics

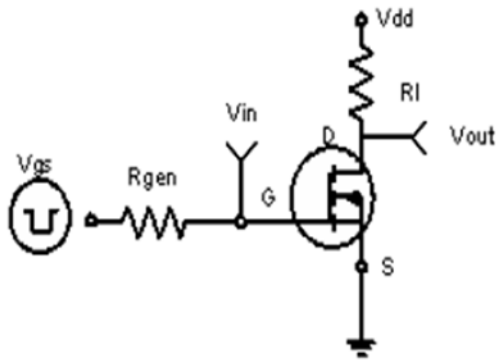


Figure1:Switching Test Circuit



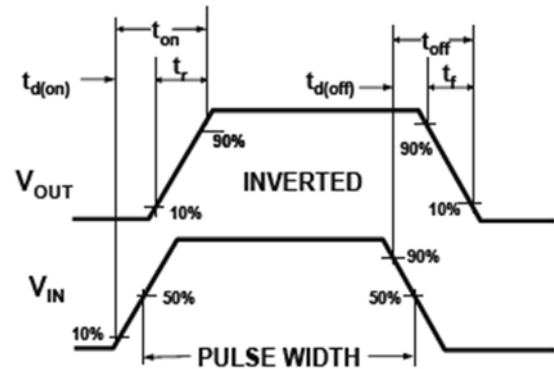


Figure2:Switching Waveforms

## Package Mechanical Data

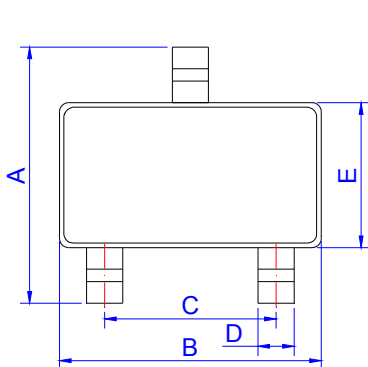


SOT-23




Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.30	2.40	2.50	0.091	0.095	0.098
B	2.80	2.90	3.00	0.110	0.114	0.118
C	1.90 REF			0.075 REF		
D	0.35	0.40	0.45	0.014	0.016	0.018
E	1.20	1.30	1.40	0.047	0.051	0.055
F	0.90	1.00	1.10	0.035	0.039	0.043
G		0.10	0.15		0.004	0.006
H	0.20			0.008		
I	0		0.10	0		0.004

## Marking

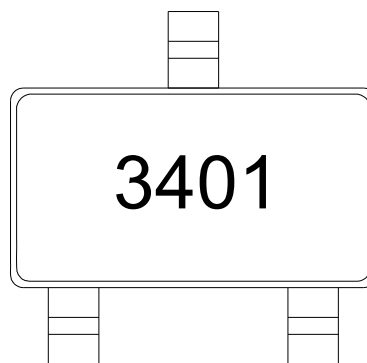

3401: Device Code

## Package Information-SOT-23

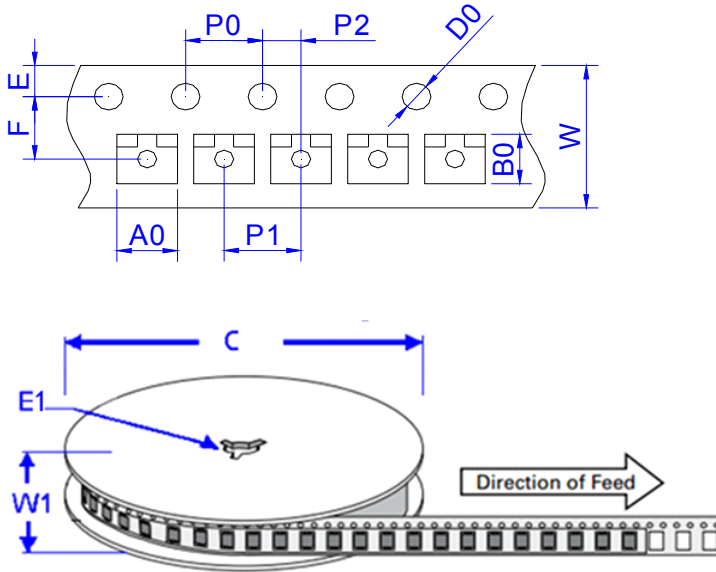

Ref.	Dimensions	
	Millimeters	Inches
A0	3.15 ± 0.3	0.124 ± 0.012
B0	2.77 ± 0.3	0.109 ± 0.012
C	178	7.0
D0	1.50±0.1	0.059 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3±0.3	0.524± 0.012
F	3.5 ± 0.2	0.138 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	8.00 ± 0.2	0.315 ± 0.008
W1	11.5±1.0	0.453 ± 0.039

## Ordering Information-SOT-23

OUTLINE	PACKAGE TYPE	QUANTITY REEL	DESCRIPTION
TAPING	SOT-23	3,000pcs	7 inch reel pack