




SS54L~SS510L

5.0Amp Surface Mounted Schottky Barrier Rectifiers

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Built-in strain relief, ideal for automated placement
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed
250°C/10 seconds at terminals

Case: JEDEC SMBF, molded plastic over

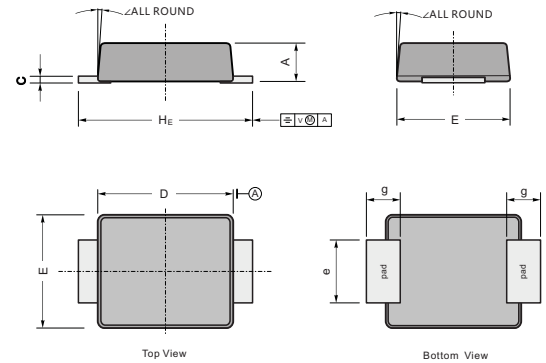

Mechanical Data

Case : Molded plastic body
 Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity : Polarity symbol marking on body
 Mounting Position : Any
 Weight : 0.0035 ounce, 0.098 grams
 Ratings at 25 C ambient temperature unless otherwise specified.

UNIT		A	C	D	E	H _E	e	g	∠
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	max	51	10	173	146	216	86	40	
	min	43	7	165	138	200	75		



Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Single phase half-wave 60Hz, resistive or inductive load,
 for capacitive load current derate by 20%.

Parameter	SYMBOLS	SS54L	SS545L	SS55L	SS56L	SS58L	SS510L	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	40	45	50	60	80	100	V
Maximum RMS voltage	V _{RMS}	28	31.5	35	42	56	70	V
Maximum DC blocking voltage	V _{DC}	40	45	50	60	80	100	V
Maximum average forward rectified current at T _L =100°C	I _(AV)	5.0						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	120.0						A
Maximum instantaneous forward voltage at 5.0A	V _F	0.48		0.55		0.70		V
Maximum DC reverse current at rated DC blocking voltage T _A = 25°C T _A = 125°C	I _R	0.5 50				0.2 20		mA
Typical thermal resistance	R _{qJA}	85.0						°C/W
Operating junction temperature range	T _J	-55 to +150						°C
Storage temperature range	T _{STG}	-55 to +150						°C



Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

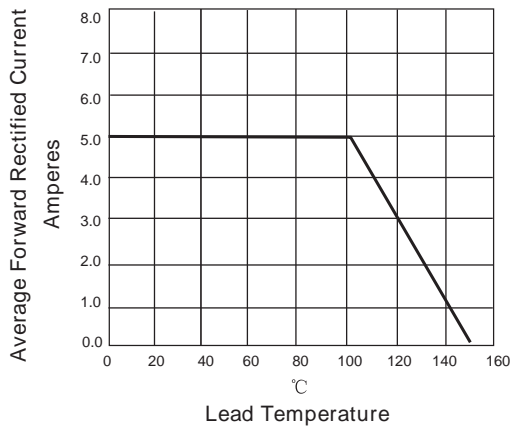


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

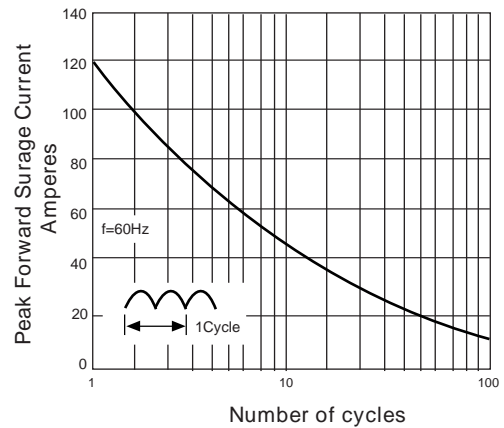


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

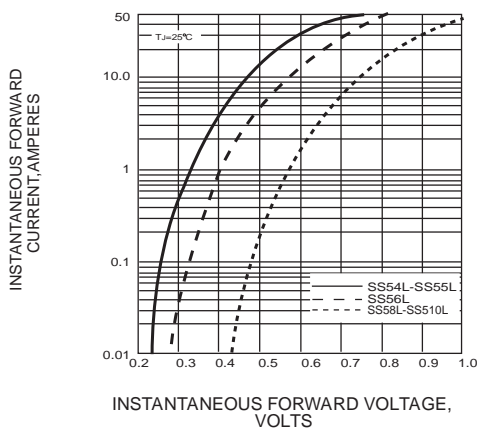


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

